


HOT WATER GUARANTEED*

- ☀️ Anti corrosive stand
- ☀️ Robust stand design
- ☀️ Designer tank cap
- ☀️ Easy replacement of electric backup
- ☀️ Specially developed Anti corrosive tank



**2.5 MM TANK
THICKNESS**

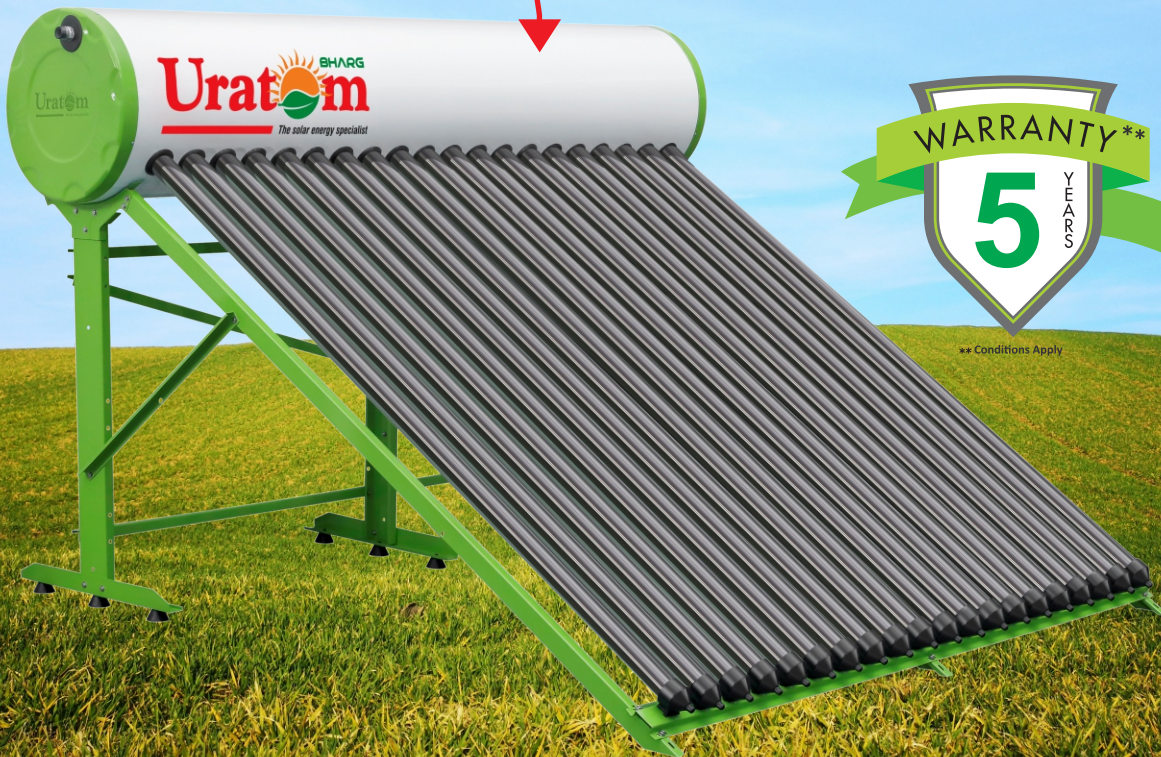

** Conditions Apply



Benefits for you

- ☀️ Get Hot Water Entire Year Without Using Gas Or Electricity
- ☀️ Almost Zero Maintenance
- ☀️ 100% Dependable Compared to Gas & Electric Geyser
- ☀️ Increased Heating Efficiency Due To Specially Developed Triple Coated Glass Tube
- ☀️ New Attractive stand look
- ☀️ Zero Running Cost

Technical Specifications for Tank (BHARG & RAY Model)

Inner Tank	2.5mm (BHARG) & 2.0mm (RAY)
Outer Cladding	0.45mm Galvanized Iron (G.I) with P P Powder Coating
Insulation	50mm PUF (38kg. / mt ³ density)
Stand	1.6 mm (G.I) with P P Powder Coating or 30 x 30 x 3mm M.S with P P Powder Coating
Connections	1"
Electric Backup Provision	1.25"

Technical Specification : (GLASS TUBE)


Material	1.6mm Borosilicate 3.3 glass
Dimension	O.D. 47mm / 58mm / 70mm I.D. 37mm / 47mm / 54mm Length : 1500mm / 1800mm 2100mm
Glass Thickness	1.6mm
Absorptive Coating	CU - AL - N / SS (Three Layer)
Absorptance	>92% (Am1.5)
Amission	<8% (80°C)
Vacume	P < 5x10 ⁻³ PA
Stagnation temperature	>200° C
Heat loss	<0.8w / sq.mtr.
Maximum strength	0.8 MPa

2.0 MM TANK THICKNESS



Applications

- ☀️ Household Water Heating
- ☀️ Hostel
- ☀️ Hospital
- ☀️ Hotels & Restaurant
- ☀️ Swimming Pool
- ☀️ Health Club
- ☀️ Boiler Feed Water Preheating



* Conditions Apply

Uratom Solar (India) Pvt. Ltd.
Survay No.752 P1, National Highway 27, Near Chordi Village,
Gondal - 360 311. (Gujarat) India.
E-mail : care@uratom.com | Web : www.uratom.com

Customer Care :
Gujarat : +91 99250 99249 | Maharashtra : +91 75070 07003
North India : +91 85888 72866

